


Dual plate check valve, wafer type

Data sheet 2622 DP, Issue 1117 ME

Dimensions in mm

Materials

Body	Ductile Iron, A536 65-45-12
Disc	Stainless steel 304, A351 CF8
Stem	Stainless steel 316, S31600
Spring	Stainless steel 316, S31600
Seat	EPDM

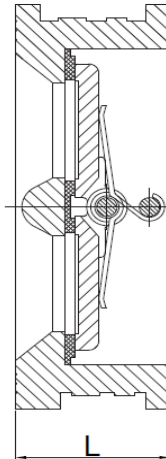

DN		Order Number	L	Ød	ØD
(mm)	(inch)				
65	2 1/2"	5 2622 41	46	73	127
80	3"	5 2622 42	64	89	142
100	4"	5 2622 43	64	114	160
125	5"	5 2622 44	70	141	192
150	6"	5 2622 45	76	168	213
200	8"	5 2622 46	89	219	270
250	10"	5 2622 47	114	273	334
300	12"	5 2622 48	114	324	380
350	14"	5 2622 49	127	360	446
400	16"	5 2622 50	140	410	498
450	18"	5 2622 51	152	450	550
500	20"	5 2622 52	152	500	610
600	24"	5 2622 53	178	624	720

Specification

Temperature range	: -20°C ... +120°C
Pressure rate	: PN25
Flange Dimensions	: according to EN1092-2
Coating	: epoxy coated, blue

Kvs Values

DN(mm)	65	80	100	125	150	200	250	300	350	400	450	500	600
Kvs(m ³ /h)	110	160	256	528	1087	1229	2372	3710	4583	5105	6021	9611	15752

Distributed by



All specifications and information within this document are reflecting the information available at the time of going to print and meant for informational purpose only. Herz Armaturen reserves the right to modify and change products as well as its technical specifications and/or its function according to technological progress and requirements. All diagrams are indicative in nature and do not to be complete. It is understood that all images of Herz products are symbolic representations and therefore may visually differ from the actual product. Colours may differ due to printing technology used. In case of any further questions don't hesitate to contact your closest HERZ Branch-Office.