

293LK

Brass Sillcock with Lockshield and Key



Via Circonvallazione, 10
13018 Valduggia (VC), Italy
Tel: +39 0163 47891
Fax: +39 0163 47895
www.vironline.com




Brass sillcock
Threaded M (ISO 228/1) with hose union
With lockshield and key

PN16
Free of CE marking (cat. according to Art. 4.3 Dir. 2014/68/EU)


Working conditions

- Suitable for: water, 0°C to +100°C
- Not suitable for: gases group 1 & 2, liquids group 1 (Dir. 2014/68/EU)

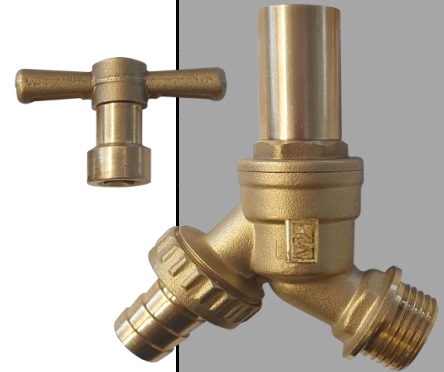

PARTLIST

| N. | Part | Material | Norm |
|----|--------------|----------|--------|
| 1 | Body | Brass | CW617N |
| 2 | Hose union | Brass | CW617N |
| 3 | O-ring | NBR | - |
| 4 | Ring | Brass | CW617N |
| 5 | Seal | NBR | - |
| 6 | Disc | Brass | CW617N |
| 7 | Gasket | PTFE | - |
| 8 | Bonnet | Brass | CW617N |
| 9 | Stem | Brass | CW617N |
| 10 | Packing rink | PTFE | - |
| 11 | Packing nut | Brass | CW617N |
| 12 | Lockshield | Brass | CW617N |
| 13 | Key | Brass | CW617N |

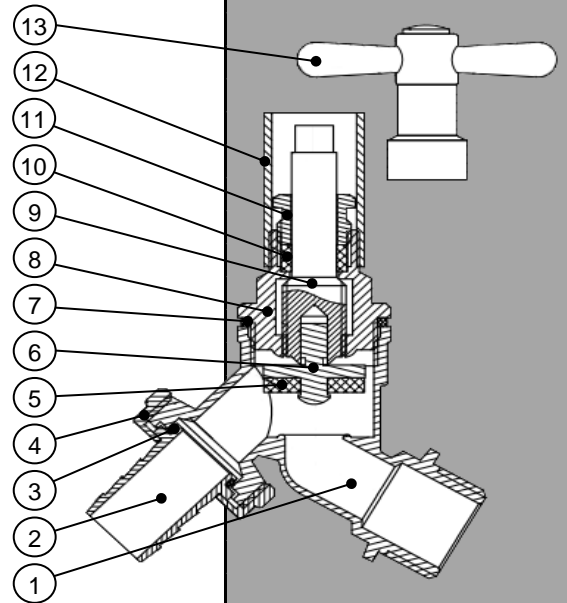

DIMENSIONS

| DN | T | D | E | AA | AB | HA | HB | L | Weight |
|-----|----|------|------|------|------|------|------|------|--------|
| | | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [mm] | [g] |
| 015 | ½" | 12 | 15,5 | 28 | 65 | 33 | 95 | 50 | 255 |

