

BALLOFIX® Lockable

Advantages

- Cost effective
- Combined anti theft protected valve and shut off valve
- Comprehensive product range
- Elegant design
- Positive internal stop
- Easy service of the valve
- Master key system




DIMENSIONS AND DATA


Dimension	Type	Version	BROEN no.
1/2" x 1/2"	female/female RP	straight	33 993 00 (Hexagon)
3/4" x 3/4"	female/female RP	straight	34 993 00 (Hexagon)
1" x 1"	female/female RP	straight	35 993 00 (Hexagon)
1 1/2" x 1 1/2"	female/female RP	straight	37 993 00 (Hexagon)
2" x 2"	female/female RP	straight	38 993 00 (Hexagon)
1/2" x 3/4" (SW)*	male/female	straight	34 997 00 (Pentagon)
3/4" x 1" (SW)*	male/female	straight	34 199 90 (Pentagon)

SPAREPARTS AND ACCESSORIES

Type	BROEN no.
Pentagon key	3371015 (3 mm)
Pentagon key	3750515 (5 mm)
Hexagon key	96K0010 (3mm)
Hexagon key	96K0002 (5mm)



PRESSURE DROP GRAPH

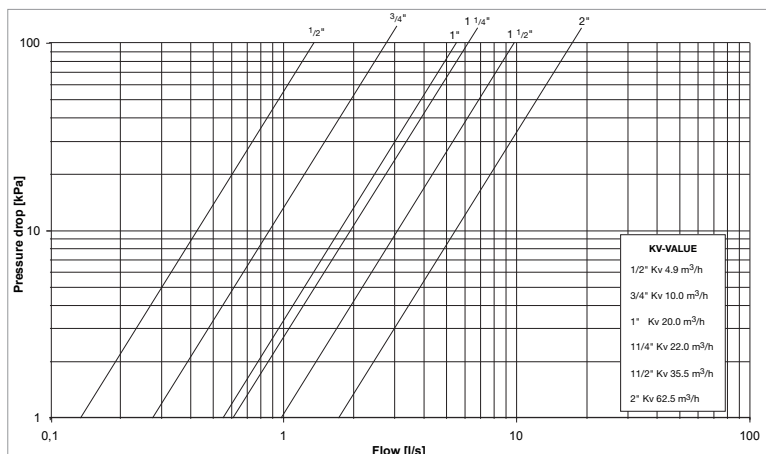

USER GUIDE


When water supply is to be closed:



Put on the key



Turn the key and take off the lock



Take the hexagon/pentagon key and shut off the water supply



Mount the lock



Turn the key and dismount it

Materials

- Surface: Plain brass
- Material: CW 614 N / CW 617N
- Thread: Parallel ISO 228/1 according to BS 2779
- Thread: RP thread - ISO 7/1 according to BS 21.
- Media: Potable water. Separate range available for gas
- Max. temperature: 120° C
- Max. pressure: 16 bar fluid pressure
- Approvals: WRAS, SIRIM & KIWA

PRINCIPLE

