


Swing Check Valve

Materials

Body	(1) GG25
Disc	(2) GGG40
Stem	(3) Stainless steel
Seats	(4) Brass CW617N
Plug	(5) Steel St37

Dimensions in mm

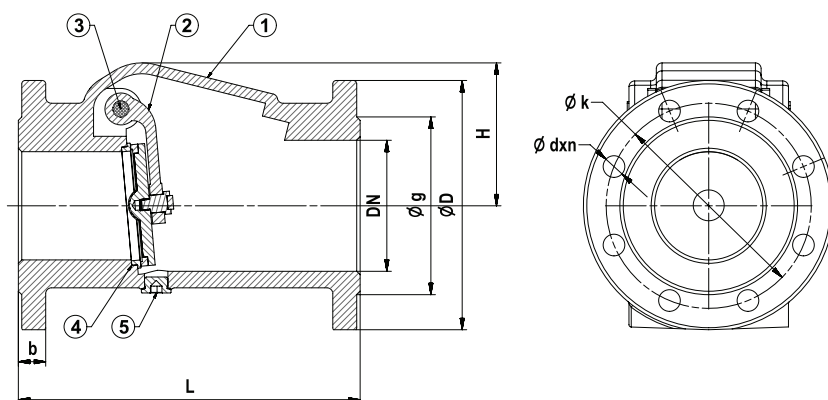

Order number	4 2622 21	4 2622 22	4 2622 23	4 2622 24	4 2622 25	4 2622 26	4 2622 27	4 2622 28	4 2622 29	4 2622 30
DN	65	80	100	125	150	200	250	300	350	400
L	240	260	300	350	400	500	600	700	800	914
H	87	104	125	157	186	240	295	372	375	438
D	185	200	220	250	285	340	405	460	520	580
k	145	160	180	210	140	295	355	410	470	525
g	118	132	156	184	211	266	319	370	420	480
b	20	22	24	26	26	20	22	25	36	40
d	19	19	19	19	23	23	28	28	28	30
n	4	8	8	8	8	12	12	12	16	16
Weight	10.5	14	20	30	43	70	120	164	215	272

Specification

Temperature range	: -10°C ... +110°C
Pressure rate	: PN16
Flange Dimensions	: according to EN1092-2
Design standard	: EN 12334
Coating	: painted blue RAL5000



For hot and cold water systems for fluids excluding acid and flammable fluids. The use of ethylene or propylene glycol in the mixing ratio 25-50% is allowed.

kvs values

DN	65	80	100	125	150	200	250	300	350	400
Kvs	117	182	292	465	680	1230	1950	3077	3480	3724

Pressure loss calculation

The pressure loss in the valve can be calculated with below given formula.

$$1. \text{hv} = \frac{\zeta \cdot c}{2g}$$

$$2. \Delta p = \frac{\gamma \cdot \text{hv}}{2g} = \zeta \frac{\gamma \cdot c}{2g}$$

hv	pressure loss (m)
Δp	pressure loss (kp/m ² = mmSS)
c	flow rate (m/s)
ζ	pressure loss coefficient
γ	density (kp/m ²)
g	9.81 m/s ²