

# PRODUCT CATALOGUE



JVS-FRT-P8  
JVS-FRT-T9 + Blackbody  
JVS-TGT-F3  
JVS-FRT-H1  
JVS-H820E  
JVS-C8W-WF



*Distributed by*



[www.anbisolutions.com](http://www.anbisolutions.com)

# JVS-FRT-P8

3-in-1 Temperature  
Mask Detection  
Face Recognition System



- Non-contact automatic Body Temperature Detection;
- Support Mask Detection;
- Support Voice Alarm (For Abnormal temperature, No Mask);
- Unique Facial Recognition Algorithm;
- Facial Recognition time  $\leq$  1 Second
- Face Database  $\geq$  30 000 faces
- 8Inch IPS HD Display
- Prevent COVID-19 epidemic by detecting human temperature and require mask wearing.



## Application Scenario



We use the high-precision temperature measurement module in this device. The temperature measurement accuracy is  $\pm 0.3^{\circ}\text{C}$ .



We use 8Inch large HD screen. Generally these kind of devices use 7Inch or 6Inch screens.



Binocular Live Detection can distinguish between real and dummy and reducing the risk of fraud.



Our product temperature measurement supports Celsius as well as Fahrenheit to meet your local needs.




We currently support English, Chinese, Korean, Italian and other voice broadcasting. We can customize the local language according to your needs.




We have professional and experienced technical support personnel to provide services to avoid worries.



# Installation and Working

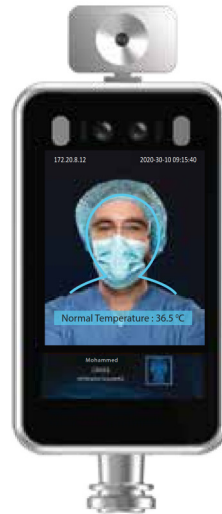

Normal  
Temperature

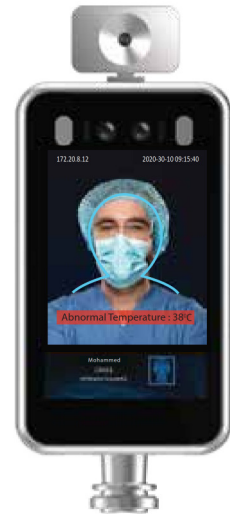

Abnormal  
Temperature

The device prevent the entry of persons with abnormal temperatures.

It only allow entry of persons with normal temperature and with mask.



## Additional Accessories



Installation Stands



Tripod




Smart Swing Gate



Installation Stands

## Wall Mount Type



JVS-FRT-P8




Wall Mount Bracket



For access control doors

## Rack Mount Type

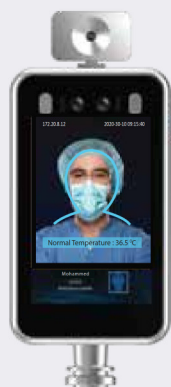

JVS-FRT-P8



Rack Mount Bracket



For smart swing gates

Model	JVS-FRT-P8
Temperature&Mask Detection	
Temperature Range&Accuracy	Range: 30-45 (°C) Accuracy:±0.3°C/Indoor
Detection Distance	0.3-0.6m
Temperature Detection	Support
Mask Detection	Support
Voice Alarm	Support (For Abnormal Temperature and No Mask)
Facial Recognition	
Recognition Accuracy	≥99.7%
Recognition time	< 1second
Face Database	≥20 000 faces
Recognition Distance&Height	Distance: 0.5~2 m Height:1.2~2.2m, Adjustable
Recognized Face Angle	≥30°
Lens Angle	2.8mm,H 117.8°, V 64.1°, D: 141.9°
Black & White List	Support
Interface	
Ethernet	10M/100M Ethernet, RJ45 Port
Wiegand Interface	1 pcs for output
RS232 & RS485	Support
Alarm Output	Support
Micro-SD Card	Built-in 32GB;Support, upto 128GB
Audio Input&Output	Support, with Built-in Speaker
USB Interface	Optional
General	
Working Temperature	-30°C - +60°C
Working Humidity	RH 5~90%
Power Supply	DC12V 3.33A
Power Consumption	≤20W
Dimensions	273mm*144mm*25mm
Diameter for Install on Gate	30mm
Screen size	8-inch, full-view IPS LCD screen
Weights	2.5KG(Without stand)
Installation	Wall Mounting, Gate Installation