
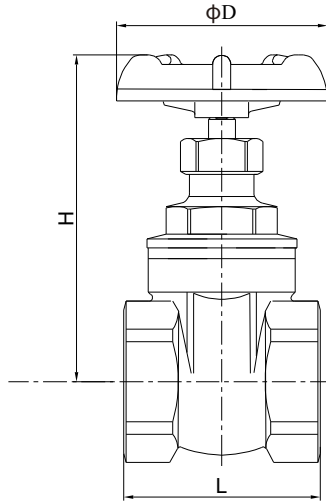


# Gate Valve

Bronze NRS Gate Valve

Fig. 3152

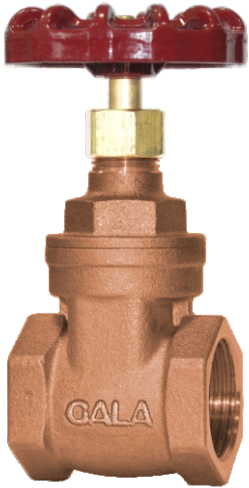

### Features

- Screwed-In bonnet (Solid Wedge Disc)
- Non-Rising Stem (Integral Seat & Asbestos Free)

### Valve Standard

BS 5154

### Thread Standard

ISO 7

### Working pressure


20 Bar

### Working Temperature

≤170°C

### Suitable Media

Water, Oil, Steam

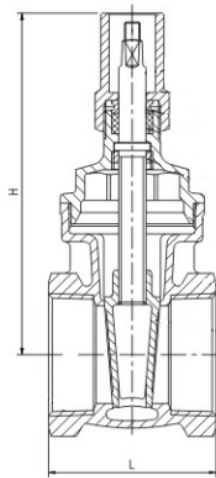

### Materials List

Part Name	Material	Specification
Body	Bronze(Gunmetal)	1982 CC491K
Bonnet	Bronze(Gunmetal)	1982 CC491K
Disc	Bronze(Gunmetal)	1982 CC491K
Stem	Brass	12164 CW602N
Packing	PTFE	-
Lockshield	Brass	12164 CW614N
Stem Bush	Brass	12164 CW602N
Handwheel	Aluminum(1 1/2"-2 1/2") Cast Iron(3"-4")	

### Dimensions(mm/inch)

DN	mm	15	20	25	32	40	50	65	80	100
	inch	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"
L		43	49	54	62	65	75	87	105	124
H		78	88	103	116	133	156	190	215	258
ΦD		52	60	65	70	78	92	100	110	130