

Gate Valve

DZR Brass Gate Valve

Fig. 3103-V

PN20



Features

- Screwed-In bonnet (Solid Wedge Disc)
- Non-Rising Stem (Integral Seat & Asbestos Free)

Valve Standard

MSS-SP 80 & BS 5154

Thread Standard


NPT/BSPT

Working pressure

20Bar

Testing Pressure

Shell Test: 30bar Hydrostatic
Seat Test: 22bar Hydrostatic

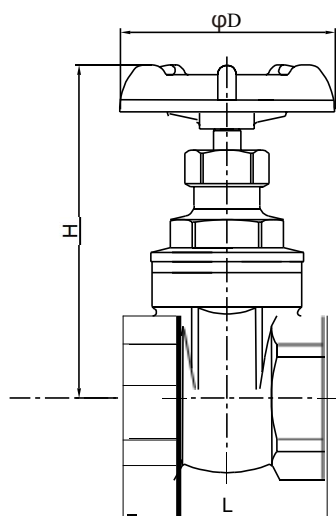

Materials List

Part Name	Material	Specification
Body	DZR Brass	CW602N
Bonnet	DZR Brass	CW602N
Disc	DZR Brass	CW602N
Stem	DZRBrass	CW602N
Packing	PTFE	PTFE
Packing Nut		C37700
Handwheel	Cast Iron	HT 200

Dimensions(mm/inch)

DN	mm inch	15 1/2"	20 3/4"	25 1"	32 1- 1/4"	40 1- 1/2"	50 2"
L		41	43	48	59	60	67
H		72	74	86	105	120	138
φD		54	54	59.3	80	80	80