

FEATURES


- Available in sizes 1/2" to 2"
- PN 20 rated - sizes 1/2" to 2"
- Brass to BS 2779 - sizes 1/2" to 2"
- Mesh size 750μ - sizes 1/2" to 2"

MAXIMUM PRESSURE CONDITIONS:

- 20 bar - temp up to 100oC
- 9 bar - temp up to 180oC

MATERIAL SPECIFICATION

Key	Component	Material
1	Washer	PTFE
2	Filter	Stainless Steel
3	Body	Brass

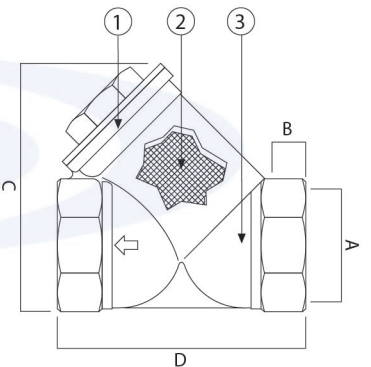

STANDARD PACKING DETAILS & DIMENSIONS

Size	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
A - Dimension (inches)	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"
B - Thread depth (mm)	9mm	13mm	13mm	16mm	19mm	20mm
C - Dimension (mm)	50mm	64mm	67mm	89mm	100mm	122mm
D - Dimension (mm)	57mm	70mm	73mm	96mm	105mm	126mm
Item weight (Gm).	127 gm	194 gm	305gm	522gm	735gm	1284gm
Inner box contains	100	60	50	30	20	12
Box weight (Kg)	15	14.4	19	15.7	14.4	13.1
Full pallet contains	3600	2160	1800	1080	760	432
Pallet weight (Kg)	554	532	698	579	561	486

Size Code No.

1/2"	ABBST-0102
3/4"	ABBST-0304
1"	ABBST-0001
1 1/4"	ABBST-1104
1 1/2"	ABBST-1102
2"	ABBST-0002

TECHNICAL SUITABILITY

Valve Suitability							
	Steam	Water	Oil	Gas Inert	Gas	Gas	Gas Oxygen
	✗	✓	✓	✗	✗	✗	✗